



IEQ1000A



2-POST LIFT

- H-shaped base for installation on floors with lower load-bearing capacity
- 2 hydraulic cylinders + chain
- Steel cable synchronisation
- Automatic release system
- Lowering solenoid valve
- Electromagnetic safety locking system
- Electronic height and cable-break micro-switch
- 3-stage symmetrical arms
- 70 mm pad extensions

INCLUDED

4 pcs x Ø 120 mm






4 pcs x 50 mm
4 pcs x 100 mm



OPTIONAL

EV01FRKD50 FORK

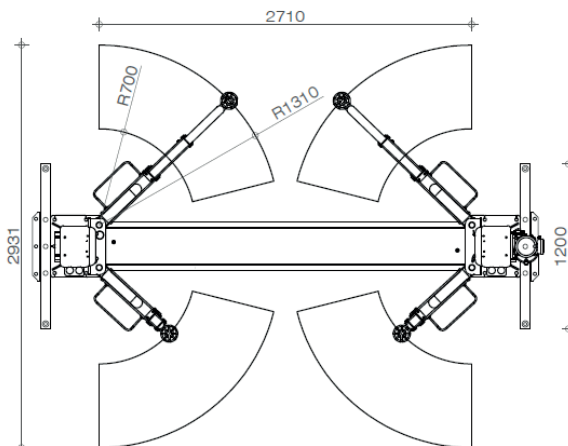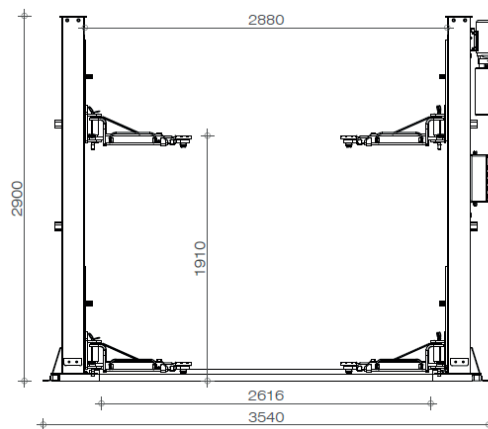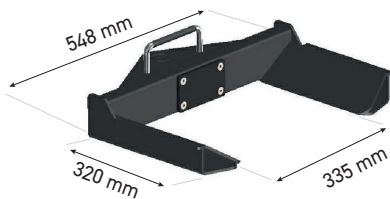

ISO TECH

